Front view

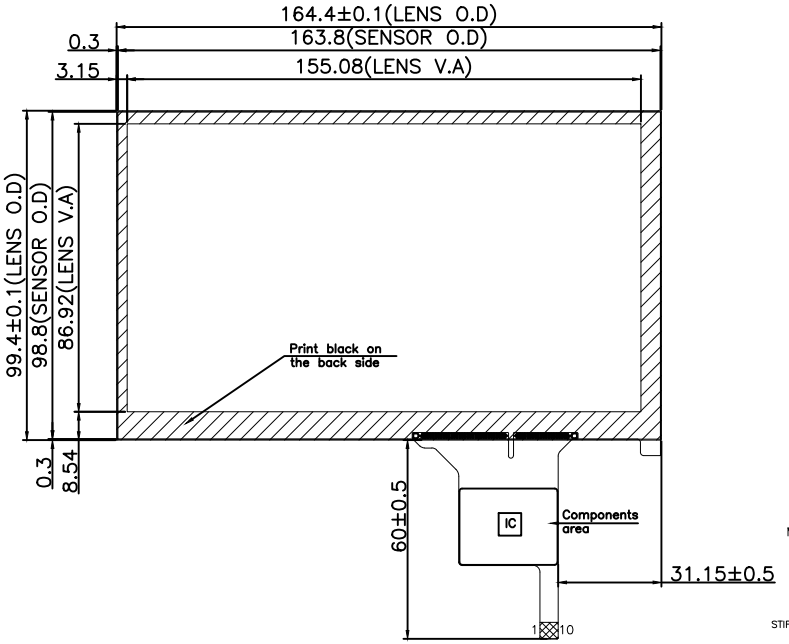

Side view

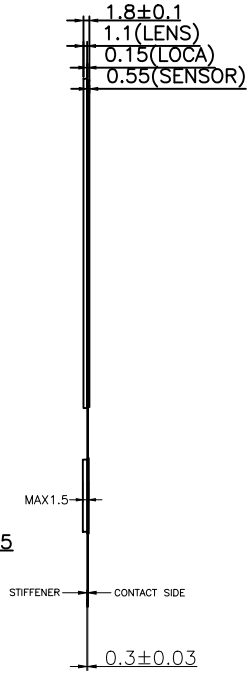

Back view

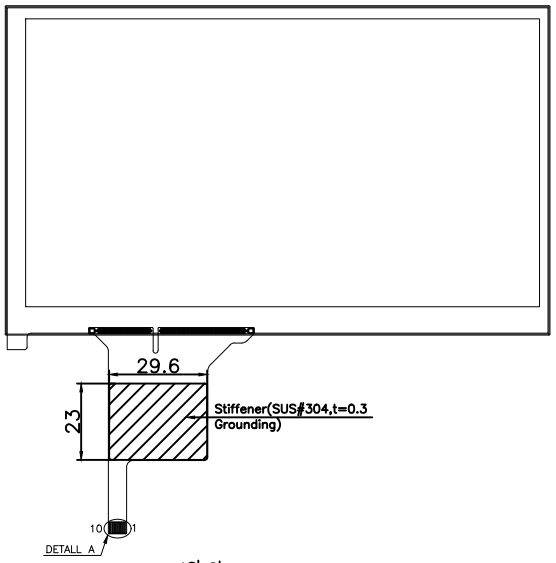

Note :
1.Structure: G+G
COVER LENS(Tempered glass)+SENSOR(ITO glass)
2. IC: Atmel641T (16*28) ;
3.transmission : ≥85 %
4.Surface hardness : 6H 750g ;
Impact energy≥0.35J
5.Multi finger : 10(Max)
6.Operating temp : −20℃~+70℃
7.Storage temp : −30℃~+80℃
8.General tolerance: ±0.2mm

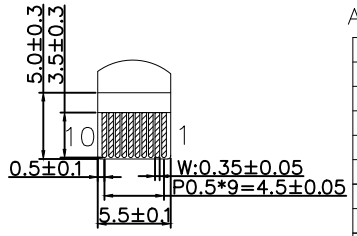

ASSIGNMENT:

1	VSS
2	VDD
3	SCL
4	NC
5	SDA
6	NC
7	RST
8	NC
9	INT
10	VSS

VER.	SYMBOL	AMENDMENT	SIGN	DATE
00		First issue		

DRAWN	CZF 2019.7.10	
ME.CHECKED		
EE.CHECKED		
APPROVED		
CUSTOMER'S APPROVAL		

TITLE: MODULE SPEC.

DRAWING NO. CTP−T700GA−51

UNIT	mm	SCALE	FIT
3rd Angle		SHEET 1 OF 1	

VICTRONIX TECENSTAR INT'L CO., LIMITED